

Fitting instruction
 Montageanleitung
 Monteringsvejledning
 Monteringsvægledning
 Montage hanleiding
 Manuel de montage




T60:



T68:



T65:

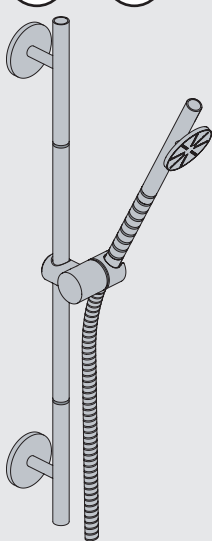

1 T60

| Data | Bar: | 1 | 2 | 3 | 4 | 5 |
|------|----------------------|------------|------------|-----------|-----------|-----------|
| T60 | (l/min) (Gal/min) | 6.9 1.8 | 9.8 2.6 | 12 3.2 | 14 3.7 | 15 4.1 |

Max. 65°C. 150°F

USA:
 Max. flow rate:
 1.6 Gal/min
 6.0 l/min.

Service - VR556

Bathtub
Badewanne

Badekar
Badkar

Badkuip
Baignoire

2 T68








3 T65


| | | | | | | | |
|--------|---------|--------|---------|--------|---------|--------|---------|
| 790 mm | 31" | 690 mm | 27 1/8" | 590 mm | 23 1/4" | 490 mm | 19 1/4" |
| 900 mm | 35 3/8" | 800 mm | 31 1/2" | 700 mm | 27 1/2" | 600 mm | 23 5/8" |

T8 → T68


3 T65

| | | | | | | | |
|--------|---------|--------|---------|--------|---------|--------|---------|
| 790 mm | 31" | 690 mm | 27 1/8" | 590 mm | 23 1/4" | 490 mm | 19 1/4" |
| 900 mm | 35 3/8" | 800 mm | 31 1/2" | 700 mm | 27 1/2" | 600 mm | 23 5/8" |

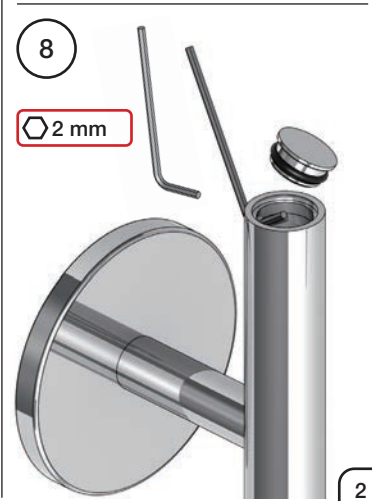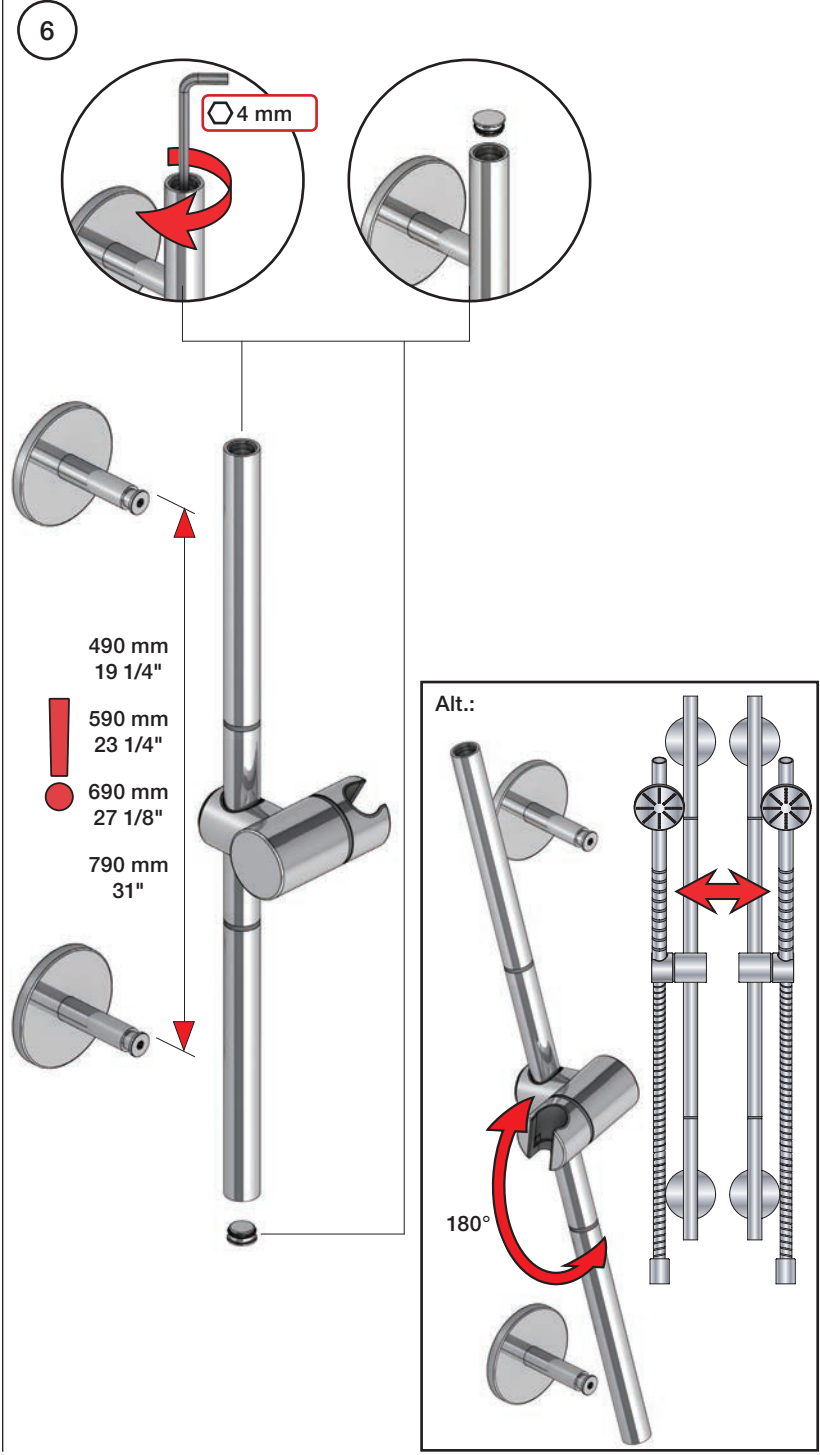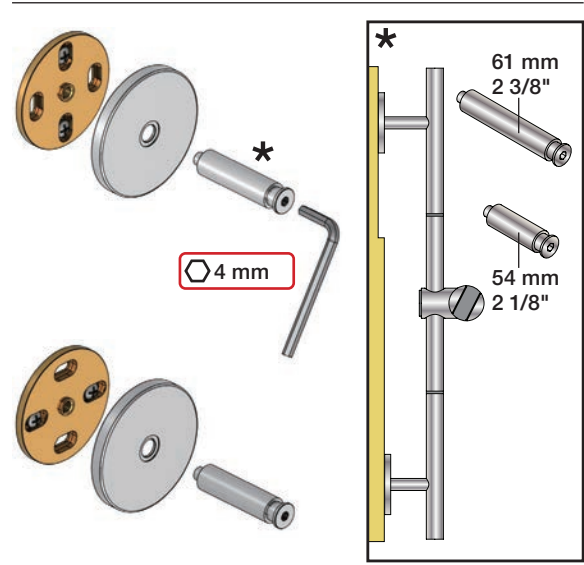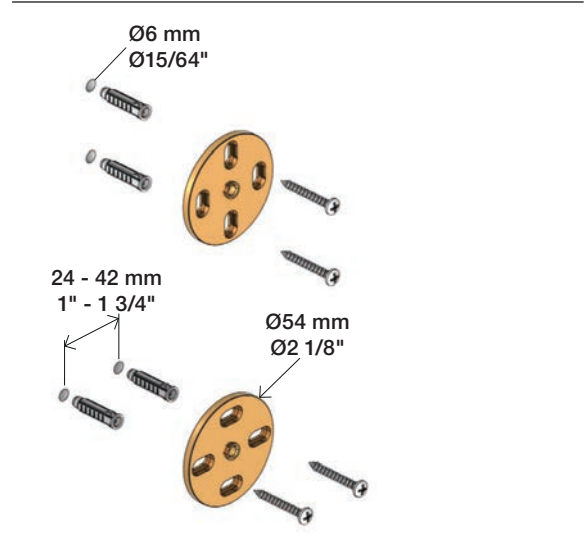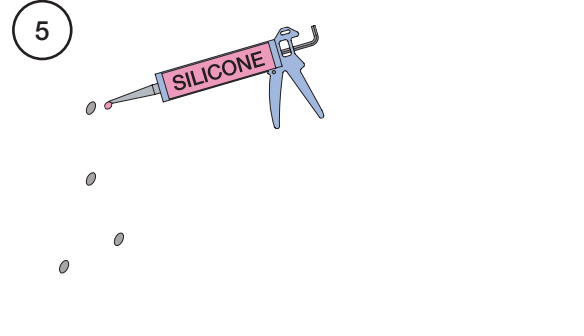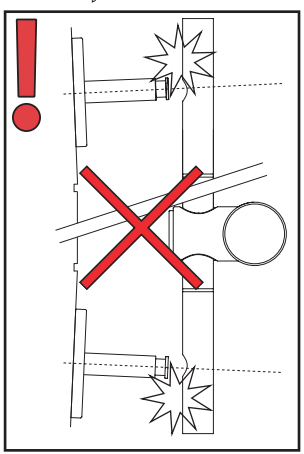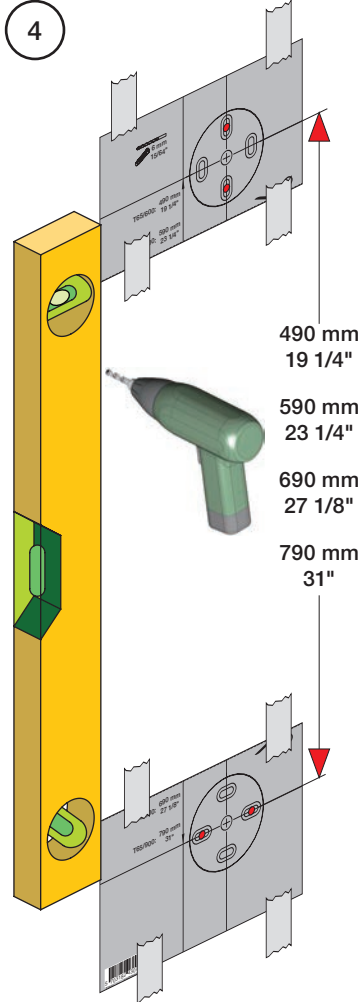






161L USA Only (2 Gal/min - 7.6 l/min - US Standard)
1575



1570 (2 M)
1570A (1.75 M)
1570B (1.5 M)

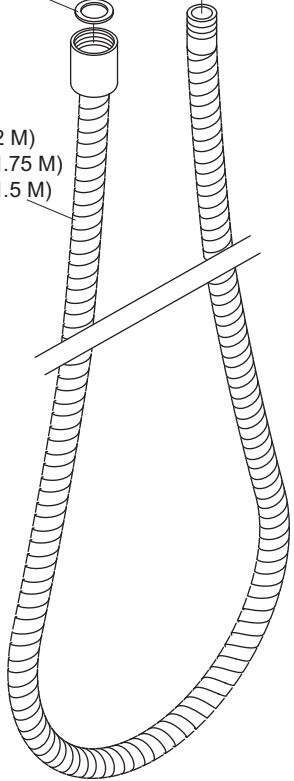

1578 (2 M)
1578A (1.75 M)
1578B (1.5 M)

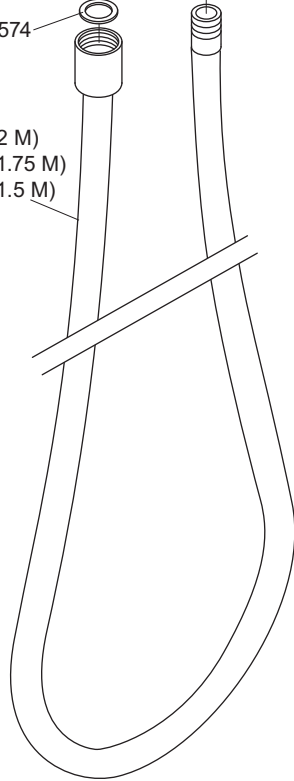

VOLA A/S
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
Fax: + 45 7023 5511
sales@vola.com
www.vola.com

VOLA T60

Dato
Mar. 15

Rev.
0

Blad
SB 42.60